

Conduit Nipples for Rigid Conduit & IMC

Applications

- Use through knockout to connect box to conduit coupling
- Use with a locknut to connect two boxes side by side or back to back
- Use with a locknut to connect fixture housing to continuous runs

Features

- Threaded NPSM for Rigid conduit and IMC
- RoHS compliant

Standard Materials


- Steel in ½" size
- Insulator: Nylon
- Malleable Iron / Ductile Iron ¾" - 6"

Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- Fed. Spec. A-A-50553
- NEMA: FB-1
- UL Listed File # E207875

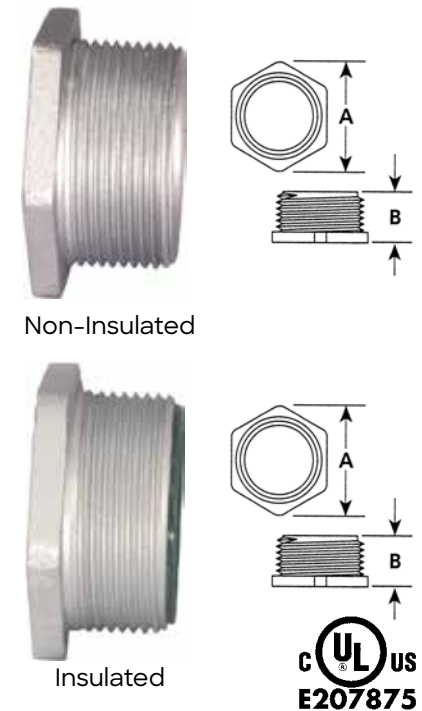

RIGID • IMC

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Inner Pack	Master Pack	Weight Per C (lb)
Non-Insulated						
N50KON	½	1.125	0.563	100	1000	5.5
N75KON	¾	1.438	0.750	100	1000	7.7
N100KON	1	1.750	0.813	50	500	14.6
N125KON	1¼	2.063	1.125	25	250	24.3
N150KON	1½	2.313	1.125	-	25	28.7
N200KON	2	2.875	1.250	-	25	37.5
N250KON	2½	3.563	1.438	-	15	70.5
N300KON	3	4.375	1.563	-	10	123.5
N350KON	3½	4.750	1.625	-	10	163.1
N400KON	4	4.875	1.688	-	10	198.4
N500KON	5	6.000	2.125	-	5	330.7
N600KON	6	7.000	2.250	-	5	440.9
Insulated						
N50-ICKON	½	1.125	0.688	100	1000	5.6
N75-ICKON	¾	1.438	0.813	100	1000	7.8
N100-ICKON	1	1.750	0.875	50	500	14.8
N125-ICKON	1¼	2.063	1.188	25	250	24.6
N150-ICKON	1½	2.313	1.188	-	25	29.1
N200-ICKON	2	2.875	1.31	-	25	38.1
N250-ICKON	2½	3.563	1.5	-	15	71.7
N300-ICKON	3	4.375	1.625	-	10	125.4
N350-ICKON	3½	4.750	1.688	-	10	165.8
N400-ICKON	4	4.875	1.813	-	10	201.6
N500-ICKON	5	6.000	2.188	-	5	336.0
N600-ICKON	6	7.000	2.375	-	5	448.0