

Rigid IMC

Insulated Conduit Bushings 150°C for Threaded Rigid Conduit & IMC

Features

- Plastic liner won't chip, crack, swell or shrink
- RoHS compliant

Standard Materials

- Body - Malleable Iron / Ductile Iron
- Insuliner - PEI rated at 150° C

Standard Finish

- Body - zinc plated


Applicable Third Party Standards

- UL Standard: 514B
- Fed. Spec. A-A-50553A
- NEMA: FB-1
- UL Listed File # E207875


U.S. Patent No. 6.808.181



Insulated

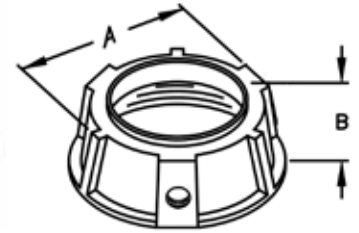

Non-Insulated

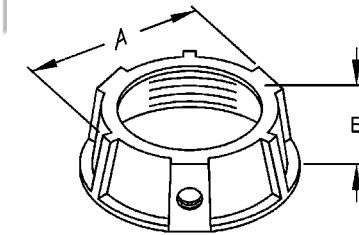

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Inner Pack	Master Pack	Weight Per C (lb)
Insulated Conduit Bushings						
BRC-50KON	½	1.063	0.688	100	500	5.5
BRC-75KON	¾	1.250	0.688	50	250	8.8
BRC-100KON	1	1.625	0.750	50	250	13.2
BRC-125KON	1¼	2.000	0.813	25	125	16.5
BRC-150KON	1½	2.313	0.813	25	125	20.9
BRC-200KON	2	2.750	0.875	10	50	25.4
BRC-250KON	2½	3.313	1.000	-	10	50.7
BRC-300KON	3	4.000	1.000	-	10	66.1
BRC-350KON	3½	4.375	1.063	-	10	71.7
BRC-400KON	4	5.063	1.125	-	10	102.5
BRC-500KON	5	6.188	1.188	-	5	146.6
BRC-600KON	6	7.188	1.188	-	5	184.1
Non-Insulated Conduit Bushings						
BRCN-50KON	½	1.063	0.625	100	500	5.5
BRCN-75KON	¾	1.250	0.625	50	250	8.7
BRCN-100KON	1	1.625	0.688	50	250	13.1
BRCN-125KON	1¼	2.000	0.750	25	125	16.4
BRCN-150KON	1½	2.313	0.813	25	125	20.7
BRCN-200KON	2	2.750	0.875	10	50	25.2
BRCN-250KON	2½	3.313	1.000	-	10	50.3
BRCN-300KON	3	4.000	1.000	-	10	65.6
BRCN-350KON	3½	4.375	1.063	-	10	71.2
BRCN-400KON	4	5.063	1.125	-	10	101.7
BRCN-500KON	5	6.125	1.188	-	5	145.5
BRCN-600KON	6	7.188	1.188	-	5	182.7

RIGID • IMC