

Insulated Conduit Bushings 150°C with Copper Lug for Threaded Rigid Conduit & IMC

Features

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes
- One set screw provided with each fitting locks bushing in any desired position
- UL Listed for use with copper or aluminum grounding conductors
- RoHS compliant

Standard Materials

- Body - Malleable Iron/Ductile Iron
- Lug - Copper
- Insuliner - PEI rated at 150° C
- Clamping screw - Steel
- Set screw - Steel


Standard Finish

- Body - Zinc plated
- Set Screw - Zinc plated

Applicable Third Party Standards

- UL Standard: 467
- UL Standard: 514B
- Fed. Spec. A-A-50553A
- NEMA: FB-1
- UL Listed File # E212551

U.S. Patent No. 6.808.181

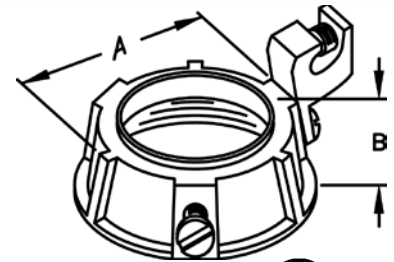

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Inner Pack	Master Pack	Weight Per C (lb)	Weight Per C
BRC-50-1CKON	½	4-14	1.063	0.688	100	500	9.9
BRC-75-1CKON	¾	4-14	1.250	0.688	50	250	13.2
BRC-100-1CKON	1	4-14	1.625	0.750	50	250	17.6
BRC-125-1CKON	1¼	4-14	2.000	0.813	25	125	20.9
BRC-125-2CKON	1¼	1/0-8	2.000	0.813	25	125	32.4
BRC-150-1CKON	1½	4-14	2.313	0.813	25	125	25.3
BRC-150-2CKON	1½	1/0-8	2.313	0.813	25	125	36.8
BRC-200-1CKON	2	4-14	2.750	0.875	10	50	29.8
BRC-200-2CKON	2	1/0-8	2.750	0.875	10	50	41.3
BRC-250-2CKON	2½	1/0-8	3.313	1.000	-	10	66.5
BRC-250-3CKON	2½	3/0-6	3.313	1.000	-	10	90.7
BRC-250-4CKON	2½	250MCM-6	3.313	1.000	-	10	101.0
BRC-300-2CKON	3	1/0-8	4.000	1.000	-	10	82.0
BRC-300-3CKON	3	3/0-6	4.000	1.000	-	10	106.1
BRC-300-4CKON	3	250MCM-6	4.000	1.000	-	10	116.4
BRC-350-3CKON	3½	3/0-6	4.375	1.063	-	10	111.7
BRC-350-4CKON	3½	250MCM-6	4.375	1.063	-	10	121.0
BRC-400-3CKON	4	3/0-6	5.063	1.125	-	10	142.5
BRC-400-4CKON	4	250MCM-6	5.063	1.125	-	10	152.8
BRC-500-3CKON	5	3/0-6	6.125	1.188	-	5	186.6
BRC-500-4CKON	5	250MCM-6	6.125	1.188	-	5	196.9
BRC-600-3CKON	6	3/0-6	7.188	1.188	-	5	224.1
BRC-600-4CKON	6	250MCM-6	7.188	1.188	-	5	234.4