

Raintight Compression Couplings

Features

- Heavy steel walls
- Raintight - Wet locations
- Concrete tight
- Blue nut eases identification
- Suitable for use outdoor
- RoHS compliant

Standard Materials


- Steel
- Nylon compression ring

Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- A-A-50533A
- NEMA: FB-1
- UL Listed File # E200730

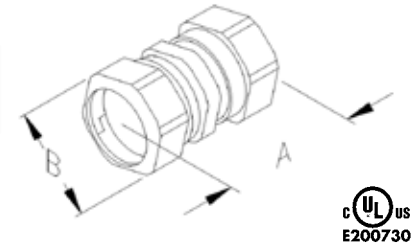

Raintight Compression Coupling

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Inner Pack	Master Pack	Weight Per C (lb)
CKR-50KON	½	1.625	1.125	50	500	14.0
CKR-75KON	¾	1.750	1.375	25	250	21.3
CKR-100KON	1	1.875	1.688	20	200	28.0
CKR-125KON	1¼	2.250	2.063	10	100	48.5
CKR-150KON	1½	2.250	2.250	10	100	59.5
CKR-200KON	2	2.750	2.750	5	50	78.9
CKR-250KON	2½	3.875	3.625	-	8	205.5
CKR-300KON	3	4.000	4.250	-	6	263.0
CKR-350KON	3½	4.688	4.688	-	4	309.4
CKR-400KON	4	4.938	5.188	-	4	393.4