

Rigid IMC

Steel Bushing for Rigid Conduit & IMC

Applications

Eliminates the use of the locknut and solves the problem of not enough thread left to engage the bushing after installing the locknut

Features

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals, and temperature extremes
- RoHS compliant

Standard Materials

- Body - steel
- Insuliner - PEI rated at 150° C


Standard Finish

- Body - zinc plated

Applicable Third Party Standards

- UL Listed File # E207875

U.S. Patent No. 7.635.816

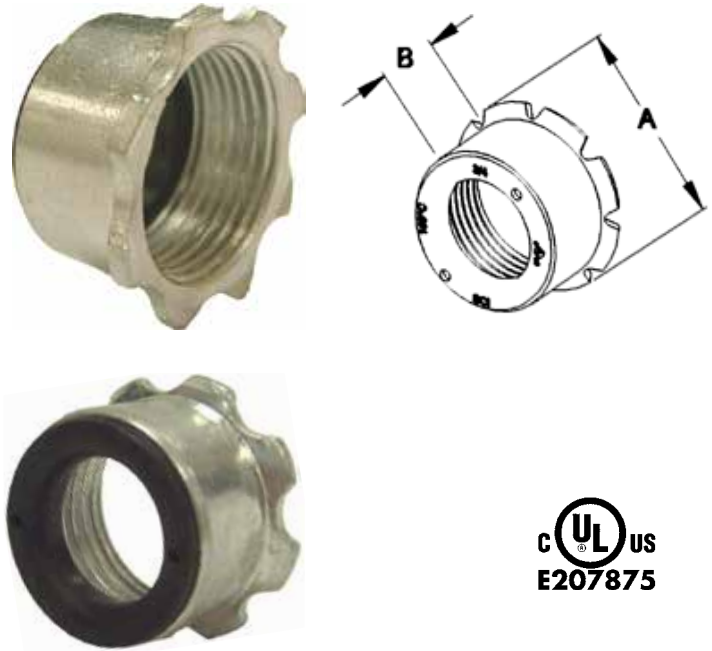

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Master Pack	Weight Per C (lb)
BRC-50STKON	1/2	1.125	0.625	50	3.0
BRC-75STKON	3/4	1.438	0.688	50	3.5
BRC-100STKON	1	1.750	0.813	50	5.4

