

Steel Set Screw Couplings for Steel Conduit

Features

- Pre-set and staked tri-head screws ½" thru 2"
- Hex head screws 2½" thru 4"
- Heavy steel walls
- Concrete tight when taped
- UL listed for Steel EMT Conduit
- RoHS compliant

Standard Materials


- Steel

Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- A-A-50553A
- NEMA: FB-1
- UL Listed File # E200730 sizes ½" thru 2"
- UL Listed File # E207875 sizes 2½" thru 4"

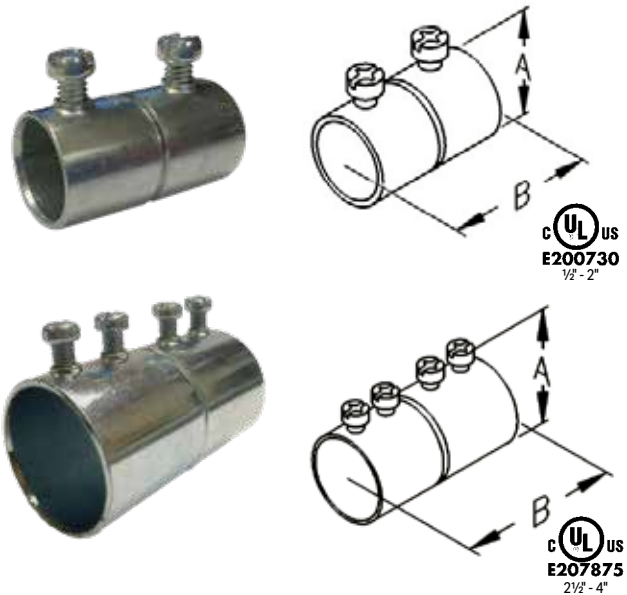

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Inner Pack	Master Pack	Weight Per C (lb)
SK50RKON	½	0.875	1.625	50	500	7.8
SK75RKON	¾	1.130	1.875	25	250	12.7
SK100RKON	1	1.190	2.313	20	200	19.6
SK125RKON*	1¼	1.750	2.064	10	100	40.2
SK150RKON*	1½	2.000	3.000	10	100	57.5
SK200RKON*	2	2.440	3.250	5	50	64.6
SK250RKON*^	2½	3.130	4.000	-	8	130.0
SK300RKON*^	3	3.750	4.250	-	6	140.0
SK350RKON*^	3½	4.250	4.500	-	4	216.6
SK400RKON*^	4	4.750	4.750	-	4	250.0

*Furnished with four set screws

^ Indicates UL and CUL. Listed for EMT, IMC and Rigid conduit, screw heads are hex shaped