

FLEX - AC - MC

90° Squeeze Connectors for Flex

Features

- Male hub threads - NPSM
- Used for armored cable, flexible metal conduit, interlock metal clad cables, HCF cables

Standard Materials

- Zinc Die Cast
- Poly carbonate insuliner

Standard Finish


- Vibratory Finish

Applicable Third Party Standards


- UL Standard: 514B
- UL Listed File E207875
- RoHS



Non-Insulated

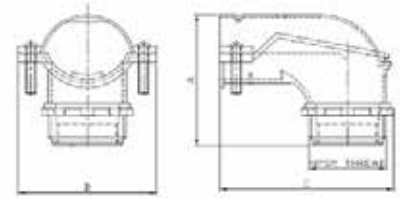

Insulated

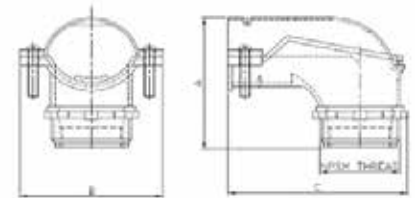

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Inner Pack	Master Pack	Weight Per C (lb)
Non-Insulated							
MSCD3890KON	3/8	1.220	1.338	1.890	25	250	7.9
MSCD5090KON	1/2	1.496	1.653	2.067	15	150	12.3
MSCD7590KON	3/4	1.575	1.890	2.382	12	120	16.1
MSCD10090KON	1	2.224	2.382	2.992	5	50	30.4
MSCD12590KON	1 1/4	2.756	2.677	4.016	4	40	43.9
MSCD15090KON	1 1/2	4.016	3.701	6.457	2	12	96.7
MSCD20090KON	2	4.016	3.701	6.693	2	12	100.2
MSCD25090KON	2 1/2	6.772	5.177	3.917	1	10	209.0
MSCD30090KON	3	7.776	5.866	4.724	1	4	285.7
MSCD40090KON	4	10.315	8.130	6.142	-	3	534.2
Insulated							
MSCD3890-ICKON	3/8	1.260	1.338	1.890	25	250	7.9
MSCD5090-ICKON	1/2	1.536	1.653	2.067	15	150	12.3
MSCD7590-ICKON	3/4	1.614	1.890	2.382	12	120	16.2
MSCD10090-ICKON	1	2.264	2.382	2.992	5	50	30.4
MSCD12590-ICKON	1 1/4	2.815	2.677	4.016	4	40	43.9
MSCD15090-ICKON	1 1/2	4.075	3.701	6.457	2	12	96.7
MSCD20090-ICKON	2	4.075	3.701	6.693	2	12	100.2
MSCD25090-ICKON	2 1/2	6.772	5.177	3.917	1	10	209.0
MSCD30090-ICKON	3	7.776	5.866	4.724	1	4	285.7
MSCD40090-ICKON	4	10.315	8.130	6.142	-	3	534.2