

Conduit Bodies, Covers, Gaskets

Form 5 Aluminum Conduit Bodies

Applications

To provide access to conductors for pulling, splicing and maintenance

Features

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet Location

Standard Materials


- Die cast aluminum
- Covers - Stamped aluminum
- Gasket - Neoprene rubber

Applicable Third Party Standards

- UL Standard: 514A
- Fed. Spec. A-A-50563
- NEMA: FB-1
- UL Listed File # E208392




ATKON

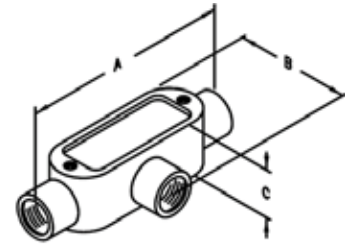

AT-CGKON

Cover & Gasket Included



Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Inner Pack	Master Pack	Weight Per C (lb)
Aluminum Die Cast Threaded T Conduit Bodies							
AT1KON	½	4.750	2.063	1.375	10	100	23.2
AT2KON	¾	5.563	2.250	1.625	10	50	37.5
AT3KON	1	6.438	2.625	1.875	5	25	53.3
AT4KON	1¼	8.250	3.563	2.500	2	10	99.9
AT5KON	1½	8.375	3.563	2.500	2	10	97.6
AT6KON	2	11.688	4.375	3.125	1	5	264.5
AT7KON	2½	13.250	5.750	4.000	-	1	374.8
AT8KON	3	13.250	5.750	4.500	-	1	444.2
AT9KON	3½	16.125	7.688	5.625	-	1	1146.4
AT10KON	4	16.125	7.688	5.625	-	1	1079.2
Aluminum Die Cast Threaded T Conduit Bodies with Stamped Aluminum Cover and Neoprene Gasket							
AT1CGKON	½	4.750	2.063	1.625	10	100	29.4
AT2CGKON	¾	5.563	2.250	1.875	10	50	44.9
AT3CGKON	1	6.438	2.625	2.125	5	25	63.3
AT4CGKON	1¼	8.250	3.563	2.750	2	10	119.0
AT5CGKON	1½	8.375	3.563	2.750	2	10	116.7
AT6CGKON	2	11.688	4.375	3.625	1	5	296.8
AT7CGKON	2½	13.250	5.750	4.250	-	1	436.5
AT8CGKON	3	13.250	5.750	4.750	-	1	505.9
AT9CGKON	3½	16.125	7.688	5.875	-	1	1269.6
AT10CGKON	4	16.125	7.688	5.875	-	1	1202.4