



## Die Cast Offset Conduit Nipples

### Features

- Tapered NPSM for Rigid conduit & IMC

### Standard Materials


- Zinc Die Cast

### Standard Finish

- Vibratory Finish

### Applicable Third Party Standards

- UL Standard: 514B
- UL Listed File E207875
- RoHS

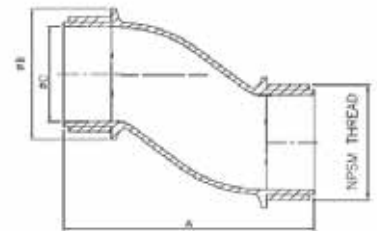

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Dim D (in)	Inner Pack	Master Pack	Weight Per C (lb)
OSND-50KON	½	2.42	0.96	0.59	0.75	35	350	9.3
OSND-75KON	¾	2.42	1.18	0.78	0.75	20	200	12.7
OSND-100KON	1	2.58	1.46	1.00	0.75	10	100	19.9
OSND-125KON	1¼	2.83	1.83	1.36	0.75	5	50	28.7
OSND-150KON	1½	2.87	2.09	1.53	0.75	5	50	38.0
OSND-200KON	2	3.11	2.56	1.99	0.75	3	30	40.5