

FLEX, AC, MC

45° Double Bite Saddle Type Connectors with Insulated Throats for Flex, AC, MC, MCI-A Cables

Applications

To connect Flex, AC, MC, MCI-A and HCF Cables to outlet boxes

Features

- Male hub threads - NPSM
- One piece malleable construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamp rides up and down on screw for ease of installation
- Furnished with Insulated Throat
- RoHS compliant

Standard Materials

- Malleable Iron / Ductile Iron
- Steel locknut
- Steel clamps


Standard Finish

- Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- Fed. Spec. A-A-50552
- NEMA: FB-1
- UL Listed File # E238299

U.S. Patent No. 8.646.813

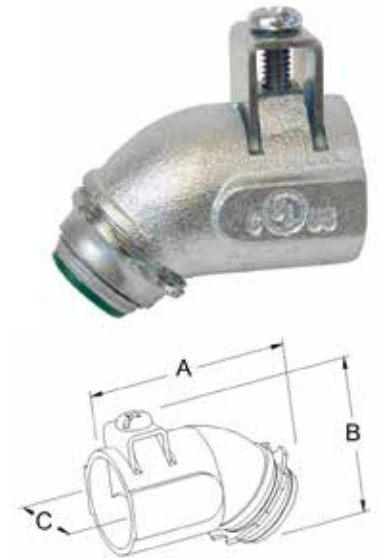

Catalog Number	Trade Size (in)	Dim A	Dim B (in)	Dim C (in)	Master Pack	Weight Per C (lb)
DB3845-ICKON	3/8	1.813	1.750	0.938	50	15.6
DB5045-ICKON	1/2	2.125	1.125	1.250	25	25.7
DB7545-ICKON	3/4	2.375	2.313	1.438	20	28.8

To cover 3/8"

Flexible Metal Conduit

Cable Type	Thread Size 3/8"	Thread Size 1/2"	Thread Size 3/4"
AC STEEL	14/2, 14/3, 14/4 12/2, 12/3, 12/4, 10/2	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3	6/4, 4/2, 4/3
AC ALUMINUM	14/2, 14/3, 14/4 12/2, 12/3, 12/4, 10/2	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3	8/3, 8/4, 6/2, 6/3, 6/4, 4/2, 4/3
MC STEEL	14/2, 14/3, 14/4 12/2, 12/3, 12/4, 10/2, 10/3, 8/2	10/4, 8/2, 8/3, 6/3	8/3, 8/4, 6/2, 6/3, 6/4, 4/3, 3/3
MC ALUMINUM	14/2, 14/3, 14/4 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2	10/4, 8/2, 8/3, 6/3	6/4, 4/3, 3/3
MCI-A	12/2, 12/3, 12/4, 12/6, 12/8, 10/3, 10/4	10/3, 10/4	