

Edge Type Clamps for Rigid Conduit, IMC & EMT

Applications

Designed to secure Rigid conduit, IMC, or EMT across, parallel or perpendicular to beam, channel and angle supports

Features

- Easily installed
- Capable of withstanding heavy loads
- RoHS compliant

Standard Materials


- Malleable Iron / Ductile Iron with steel bolts and nuts

Standard Finish

- Malleable Iron / Ductile Iron part - Hot-dip galvanized

Applicable Third Party Standards

- UL Standard: 2239
- UL Listed File # E213669

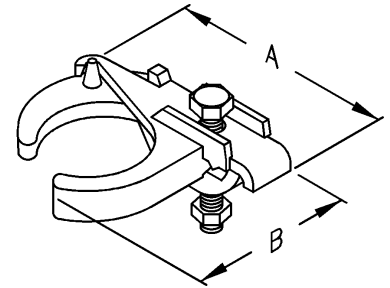

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Master Pack	Weight Per C (lb)
SETC50KON	1/2	2.813	2.125	50	77.3
SETC75KON	3/4	2.938	2.375	50	80.6
SETC100KON	1	3.063	5.625	50	88.9
SETC125KON	1 1/4	3.063	3.063	25	100.6
SETC150KON	1 1/2	3.980	3.250	25	112.8
SETC200KON	2	4.500	4.063	25	175.2
SETC250KON	2 1/2	5.125	4.625	10	206.9
SETC300KON	3	5.750	5.250	10	246.0