

## Liquidtight

### Straight, Liquidtight Fitting with Aluminum Grounding Lug

#### Features

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight / Raintight / Oiltight / Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit pop-out
- RoHS compliant
- Use with Liquidtight Flexible Metal Conduit

#### Standard Materials

- Lug - Aluminum
- Malleable Iron
- Nylon
- Steel ferrule
- Steel locknut

#### Standard Finish


- Zinc plated

#### Applicable Third Party Standards


- UL Standard: 514B
- UL Standard: 467
- Fed. Spec. A-A-50553
- NEMA: FB-1
- UL Listed File # E212551
- Suitable for grounding in sizes 3/8" through 1 1/4" under NEC 350.60 and 250.118(6)
- Suitable for use in the following hazardous locations under NEC, Class I, Division 2; Class II, Division 1 and 2; and Class III, Division 1 and 2



Non-Insulated

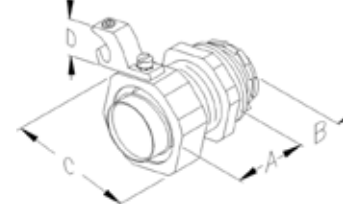

Insulated



Catalog Number	Trade Size (in)	Lug Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Dim D (in)	Master Pack	Weight Per C (lb)
<b>Non-Insulated</b>								
LT38ALKON	3/8	4-14	0.94	0.56	1.19	0.75	25	15.4
LT50ALKON	1/2	4-14	0.94	0.63	1.31	0.75	25	17.6
LT75ALKON	3/4	4-14	1.06	0.56	1.56	0.75	10	28.7
LT100ALKON	1	4-14	1.13	0.69	1.88	0.75	10	39.7
LT125ALKON	1 1/4	4-14	1.25	0.69	2.25	0.75	5	55.1
LT150ALKON	1 1/2	4-14	1.38	0.69	2.50	0.75	2	70.5
LT200ALKON	2	4-14	1.44	0.75	3.00	0.75	1	99.2
LT250ALKON	2 1/2	1/0-8	2.19	1.06	4.06	1.13	5	363.8
LT300ALKON	3	1/0-8	2.50	1.13	4.88	1.13	5	456.4
LT350ALKON	3 1/2	3/0-6	2.69	1.19	5.44	1.50	5	668
LT400ALKON	4	3/0-6	3.00	1.25	6.06	1.50	1	789.2
<b>Insulated</b>								
LT38AL-ICKON	3/8	4-14	0.94	0.63	1.19	0.75	25	17.6
LT50AL-ICKON	1/2	4-14	0.94	0.63	1.38	0.75	25	19.8
LT75AL-ICKON	3/4	4-14	1.06	0.63	1.56	0.75	25	30.9
LT100AL-ICKON	1	4-14	1.13	0.75	1.88	0.75	10	41.9
LT125AL-ICKON	1 1/4	4-14	1.25	0.75	2.25	0.75	5	57.3
LT150AL-ICKON	1 1/2	4-14	1.75	0.75	2.50	0.75	2	72.8
LT200AL-ICKON	2	4-14	1.44	0.75	3.00	0.75	1	101.4
LT250AL-ICKON	2 1/2	1/0-8	2.19	1.06	4.06	1.13	1	372.6
LT300AL-ICKON	3	1/0-8	2.50	1.25	4.88	1.13	1	465.2
LT350AL-ICKON	3 1/2	3/0-6	2.69	1.31	5.44	1.50	1	685.6
LT400AL-ICKON	4	3/0-6	3.00	1.38	6.06	1.50	1	806.9