

Conduit Bodies, Covers, Gaskets

Form 5 Malleable Iron Conduit Body Covers

Applications

To cover conduit body opening

Features

- Supplied with steel captive screws
- Sizes 2½" thru 4" with raised dome affords additional wiring room

Standard Materials

- Malleable Iron / Ductile Iron

Standard Finish


- Zinc plated

Applicable Third Party Standards


- UL Standard: 514A
- Fed. Spec. A-A-50563
- NEMA: FB-1
- UL Listed File # E208392



1/2" through 2"



2 1/2" through 4"
Raised Dome affords additional wiring room

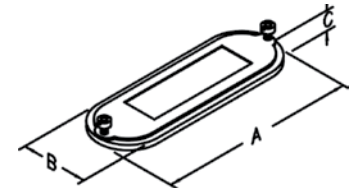

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Master Pack	Weight Per C (lb)
CM1KON	½	3.938	1.313	0.188	50	23.4
CM2KON	¾	4.625	1.500	0.188	50	30.6
CM3KON	1	5.313	1.750	0.250	50	40.6
CM4KON	1¼- 1½	7.188	2.500	0.313	50	91.3
CM5KON	2	9.500	3.188	0.313	25	208.1
CM6KON	2½-3	12.25	4.313	1.063	10	358.1
CM7KON	3½-4	14.875	5.625	1.125	5	550.0