

FLEX - AC - MC

Screw in Coupling

Features

- Join flexible metal conduit

Standard Materials


- Zinc Die Cast

Standard Finish

- Vibratory Finish

Applicable Third Party Standards

- UL Standard: 514B
- UL Listed File E207875
- RoHS

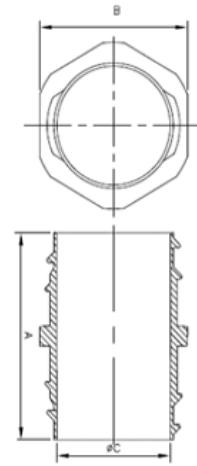

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Inner Pack	Master Pack	Weight Per C (lb)
GFKD50KON	1/2	1.81	0.91	0.55	40	400	5.4
GFKD75KON	3/4	2.09	1.08	0.73	25	250	7.0
GFKD100KON	1	2.4	1.36	0.92	15	150	12.0
GFKD125KON	1 1/4	2.7	1.63	1.16	10	100	22.7
GFKD150KON	1 1/2	3.03	1.93	1.39	6	60	33.1
GFKD200KON	2	3.25	2.44	1.89	3	30	50.6