

Conduit Bodies, Covers, Gaskets

Form 5 Conduit Bodies

Applications

To provide access to conductors for pulling, splicing and maintenance

Features

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials

- Malleable Iron/Ductile Iron

Standard Finish


- Zinc plated with aluminum enamel paint

Applicable Third Party Standards


- UL Standard: 514A
- Fed. Spec. A-A-50563
- NEMA: FB-1
- UL Listed File # E208392



MTKON

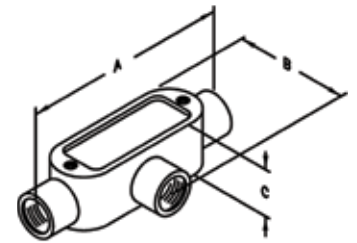

MTBKON



Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Master Pack	Weight Per C (in)
Threaded T Conduit Bodies						
MT1KON	½	5.625	2.063	1.313	10	122.4
MT2KON	¾	6.000	2.250	1.500	10	152.6
MT3KON	1	7.063	2.625	1.813	5	218.4
MT4KON	1¼	9.000	2.750	2.625	5	369.0
MT5KON	1½	9.000	3.500	2.625	5	405.8
MT6KON	2	11.500	4.125	3.125	5	723.9
MT7KON	2½	15.000	5.688	4.313	1	1377.1
MT8KON	3	15.125	5.875	4.313	1	1609.5
MT9KON	3½	18.125	6.813	4.875	1	2708.7
MT10KON	4	18.125	7.188	4.875	1	2708.7
Threaded TB Conduit Bodies						
MTB1KON	½	5.375	1.312	2.075	10	100.3
MTB2KON	¾	6.000	1.562	2.40	10	135.3
MTB3KON	1	7.063	1.812	2.778	5	219.3
MTB4KON	1¼	9.000	2.437	3.519	5	380.1
MTB5KON	1½	9.000	2.562	3.525	5	457.4
MTB6KON	2	11.500	3.187	4.360	5	751.5

