

Rigid - IMC

DIE CAST

Zinc Die Cast Insulated and Non-Insulated Conduit Bushings

Features

- Use with locknut to terminate threaded Rigid or IMC conduit to an outlet box

Standard Materials

- Zinc Die Cast
- Poly carbonate insuliner

Standard Finish


- Vibratory Finish

Applicable Third Party Standards


- UL Standard: 514B
- UL Listed File E207875
- RoHS



Non-Insulated

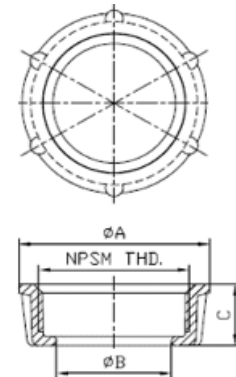

Insulated

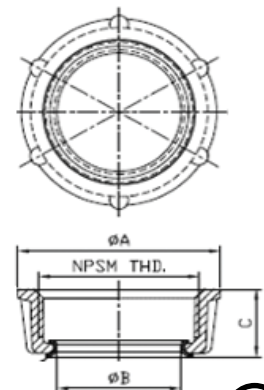

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Inner Pack	Master Pack	Weight Per C (lb)
Non-Insulated							
BRCND-50KON	½	1.06	0.59	0.41	100	1000	2.1
BRCND-75KON	¾	1.28	0.78	0.43	100	1000	2.5
BRCND-100KON	1	1.54	1.00	0.49	50	500	4.1
BRCND-125KON	1¼	1.89	1.31	0.51	30	300	6.5
BRCND-150KON	1½	2.17	1.53	0.51	20	200	10.2
BRCND-200KON	2	2.64	1.99	0.51	15	150	10.3
BRCND-250KON	2½	3.19	2.37	0.71	7	70	18.2
BRCND-300KON	3	3.82	2.97	0.71	5	50	29.7
BRCND-400KON	4	4.84	3.93	0.73	2	20	53.1
Insulated							
BRCD-50KON	½	1.06	0.59	0.45	100	1000	2.1
BRCD-75KON	¾	1.28	0.72	0.47	100	1000	2.6
BRCD-100KON	1	1.54	1.00	0.53	50	500	4.2
BRCD-125KON	1¼	1.89	1.31	0.57	30	300	6.7
BRCD-150KON	1½	2.17	1.53	0.57	20	200	9.5
BRCD-200KON	2	2.64	1.99	0.57	15	150	10.9
BRCD-250KON	2½	3.19	2.36	0.79	7	70	19.2
BRCD-300KON	3	3.82	2.95	0.79	5	50	31.4
BRCD-400KON	4	4.84	3.91	0.81	2	20	57.5