

PVC COATED CONDUIT BODIES - LR FORM 7

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws


Applications:

Allied Tube & Conduit® offers the full line of Form 7 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

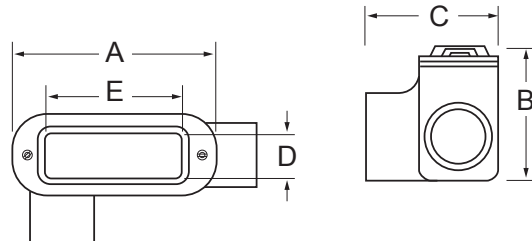

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PV0500LR17	½	16	5.10	1.42	2.29	0.94	3.19	120
PV0700LR27	¾	21	5.98	1.67	2.49	1.13	3.81	160
PV1000LR37	1	27	7.04	1.92	2.79	1.38	4.50	210
PV1200LR47	1¼	35	7.79	2.35	3.23	1.75	5.00	300
PV1500LR57	1½	41	8.67	2.60	3.60	1.94	5.44	410
PV2000LR67	2	53	10.17	3.17	4.17	2.44	6.38	570
PV2500LR777	2½	63	12.54	3.67	5.79	3.56	8.38	1000
PV3000LR87	3	78	12.54	4.42	5.79	3.56	8.38	1270
PV3500LR97	3½	91	14.73	4.42	6.98	4.50	10.25	1900
PV4000LR107	4	103	14.73	5.42	6.98	4.50	10.25	1900

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit alliedeg.us