

# PVC COATED CONDUIT BODIES - LR MARK 9

## Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Sizes available are ½" to 4"
- Fittings are supplied with plastic encapsulated stainless steel screws


## Applications:

Allied Tube & Conduit® offers the full line of Mark 9 PVC Coated Aluminum Conduit Bodies. All fittings are supplied with PVC aluminum covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



## Standards:

- UL Standard 514B
- CSA Standard: C22.2 No. 18

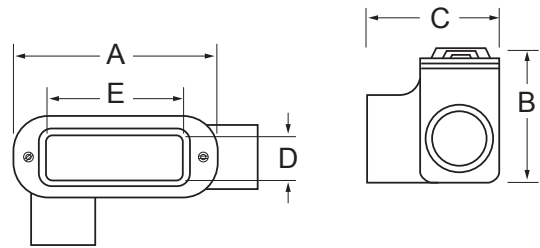

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)
PA0500LL19	½	16	5.48	1.48	2.20	1.00	3.31
PA0700LL29	¾	21	6.35	1.73	2.35	1.19	3.94
PA1000LL39	1	27	7.51	1.98	2.67	1.38	4.56
PA1200LL49	1¼	35	8.82	2.42	3.20	1.75	5.31
PA1500LL59	1½	41	10.67	2.82	4.04	2.13	6.50
PA2000LL69	2	53	13.04	3.60	5.04	3.00	8.56
PA2500LL789	2½	63	15.98	4.48	6.73	4.25	10.88
PA3000LL889	3	78	15.98	4.85	6.73	4.25	10.88
PA3500LL989	3½	91	14.73	4.92	6.98	4.50	10.25
PA4000LL1089	4	103	14.73	5.42	6.98	4.50	10.25

All dimensions are for informational purposes only \*Tolerances +/- 5%



For more info visit [alliedeg.us](http://alliedeg.us)