

PVC COATED CONDUIT BODIES - T FORM 8

Features:

- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Specialized corrosion resistant coating provided on threads
- Fittings are supplied with plastic encapsulated stainless steel screws
- Sizes available are ½" to 4"
- 3½" and 4" in PVC Coated Aluminum Mark 9 only


Applications:

Allied Tube & Conduit® offers the full line of Form 8 PVC Coated Conduit Bodies. All fittings are supplied with PVC coated cast iron covers. The sleeved threaded ends offer complete protection against corrosion while maintaining full ground continuity throughout the installed system.



Standards:

- UL Listed Standard 514B File# 307133
- CSA Standard: C22.2 No. 18
- Verified NEMA 4X Rated

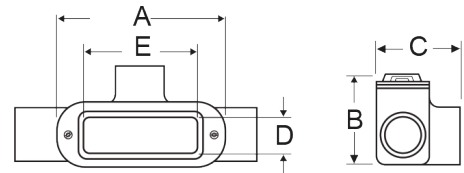

Part Number	Trade Size (in)	Metric Size (mm)	A (in)	B (in)	C (in)	D (in)	E (in)	Weight / 100 (lbs)
PV0500T18	½	16	6.69	1.79	2.20	1.00	3.31	180
PV0700T28	¾	21	2.50	2.04	2.35	1.19	3.94	250
PV1000T38	1	27	3.30	2.29	2.67	1.38	4.56	330
PV1200T48	1¼	35	1.90	2.67	3.20	1.75	5.31	490
PV1500T58	1½	41	7.50	2.82	4.04	2.13	6.50	750
PV2000T68	2	53	11.70	3.60	5.04	3.00	8.56	1170
PV2500T78	2½	63	19.80	4.48	6.73	4.25	10.88	1980
PV3000T88	3	78	23.10	4.85	6.73	4.25	10.88	2100
PA3500T989	3½	91	21.00	5.73	8.17	5.44	13.44	2350
PA4000T1089	4	103	24.00	5.98	8.17	5.44	13.44	2400

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit alliedeg.us