


Cover and Gasket

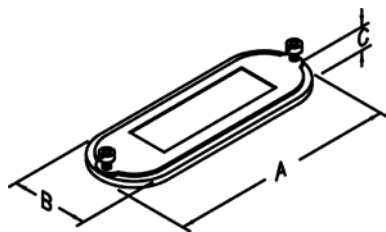

Gray Iron Cast Cover

Form 7 Steel and Gray Iron Covers and Neoprene Gaskets

Applications

To cover conduit body opening

Features

- Raised dome affords additional wiring room
- Captive steel screws

Standard Materials

- Steel cover and clips
- Stainless Steel screws
- Gray Iron
- Neoprene rubber

Applicable Third Party Standards

- UL Standard: 514A
- Fed. Spec. A-A-50563
- NEMA: FB-1
- UL Listed File # E208392
- CSA 243470



Steel Cover and Gasket

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Master Pack	Weight Per C (lb)
170-CGKON	1/2	3.688	1.375	0.250	25	14.7
270-CGKON	3/4	4.313	1.563	0.250	25	18.4
370-CGKON	1	5.063	1.938	0.250	20	25.7
470-CGKON	1 1/4	5.563	2.250	0.250	10	32.8
570-CGKON	1 1/2	6.063	2.500	0.250	10	38.6
670-CGKON	2	7.063	3.063	0.250	10	53.0
870-CGKON	2 1/2-3	9.063	4.250	0.500	5	107.0
970-CGKON	3 1/2-4	11.063	5.313	0.500	5	170.2

Grey Iron Cast Cover and Gasket

Catalog Number	Trade Size (in)	Dim A (in)	Dim B (in)	Dim C (in)	Master Pack	Weight Per C (lb)
170F-CGKON	1/2	3.688	1.313	0.375	20	29.9
270F-CGKON	3/4	4.313	1.500	0.375	20	34.7
370F-CGKON	1	5.063	1.750	0.500	10	57.6
470F-CGKON	1 1/4	5.500	2.188	0.500	5	71.7
570F-CGKON	1 1/2	6.063	2.438	0.563	5	96.4
670F-CGKON	2	7.063	3.000	0.563	5	126.9
870F-CGKON	2 1/2-3	8.750	4.250	0.563	5	213.0
970F-CGKON	3 1/2-4	11.000	5.063	0.563	5	323.4

